

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number  
WO 2004/064919 A1

- (51) International Patent Classification<sup>7</sup>: A61N 1/39
- (21) International Application Number:  
PCT/EP2004/000402
- (22) International Filing Date: 15 January 2004 (15.01.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
S2003/0023 17 January 2003 (17.01.2003) IE
- (71) Applicant (for all designated States except US): HEART-SINE TECHNOLOGIES LIMITED [GB/GB]; Thomas Andrews House, Queen's Island, Belfast BT3 9DU (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SMIRLES, William, J. [US/US]; 1260 Anthony Lane, Deerfield, IL 60015 (US). ANDERSON, Johnny, H. [GB/GB]; 58 Ardmore Road, Holywood, County Down BT18 0JP (GB).
- (74) Agents: CASEY, Lindsay, Joseph et al.; F.R. Kelly & Co, 27 Clyde Road, Ballsbridge, Dublin 4 (IE).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,

[Continued on next page]

(54) Title: DISPOSABLE DEFIBRILLATOR ELECTRODE ASSEMBLY

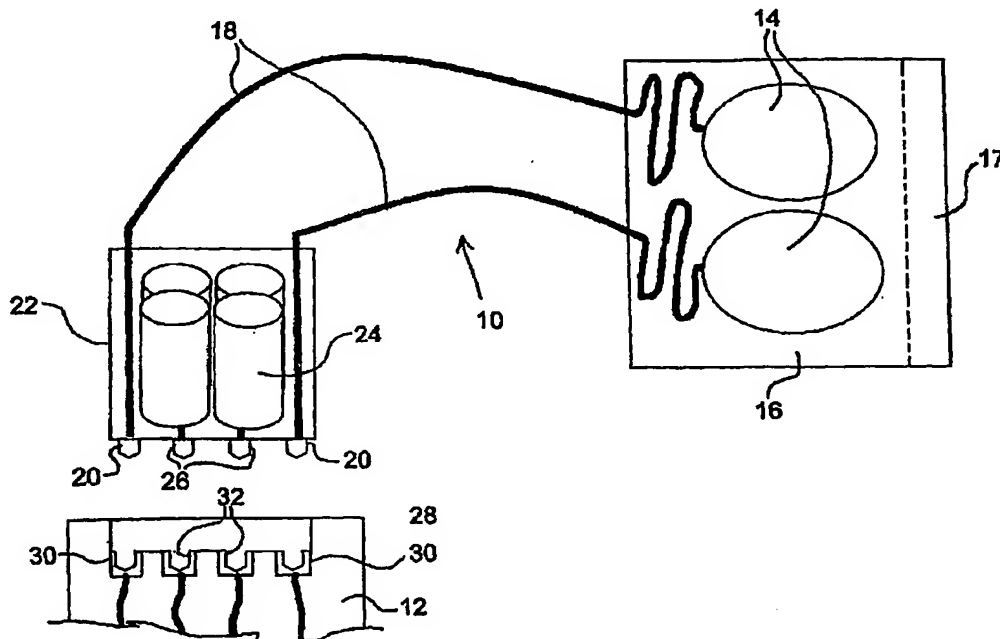

(57) Abstract: A disposable electrode assembly for a portable defibrillator (12) comprises defibrillator electrodes (14), batteries (24) for powering the defibrillator, and a connector (22) for connecting the electrodes and batteries to the defibrillator. The connector has power output terminals (26) for connecting the battery to the defibrillator and high voltage input terminals (20) for applying a defibrillation voltage to the electrodes. The batteries (24) are housed in the connector (22), or mounted on the rear of one electrode



CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Disposable Defibrillator Electrode Assembly**

This invention relates to a disposable electrode assembly for a portable defibrillator.

5

Portable defibrillators have been available for the last 20 years. The operation of these devices has always involved, at minimum, three actions: step (1) applying a power source to the device (either through a  
10 battery pack or a mains plug); step(2) plugging a set of defibrillation electrodes (pads) into the device and applying the electrodes to the patient's bare chest, and step (3) turning the device on (either via an on/off button or opening a lid, etc.).

15

In a public situation, e.g. a railway station, airport or the like, it is desirable that the device be operable by a lay member of the public without undue complication.

20

Accordingly, it is an object of the invention to simplify the operation of a portable defibrillator, at least to the extent that steps (1) and (2) above are combined.

25

According to an aspect of the present invention, there is provided a disposable electrode assembly as specified in claim 1.

30

The invention further provides a combination of a defibrillator and a disposable electrode assembly as specified in claim 7.

It is a subsidiary object of the invention also to eliminate step (3) above, so that a single action will power the defibrillator and turn it on.

5 A subsidiary benefit of the invention is that in conventional defibrillation using disposable pads and batteries, battery management must be carefully considered and constantly monitored. The present invention separates the process of battery management  
10 from the defibrillation process by incorporating the power source for the defibrillator within the disposable electrode assembly.

The invention is also directed to a method by which the  
15 described apparatus operates and including method steps for carrying out every function of the apparatus.

The invention will be understood in greater detail from the following description of preferred embodiments  
20 thereof given by way of example only and with reference to the accompanying drawings, in which:

Fig. 1 is a schematic diagram of a first embodiment of the invention;

25

Fig. 2 shows a modification of the embodiment of Fig. 1;

Figs. 3 to 9 are schematic diagrams of further  
30 embodiments of the invention;

Fig. 10 is an exploded perspective view of a practical implementation of the embodiment of Fig. 7;

Fig. 11 is a top perspective view of a further embodiment of the invention;

5 Fig. 12 is a top perspective view of the combined pad and battery housing of the embodiment of Fig. 11, omitting the pads;

Fig. 13 is a top perspective view of the combined pad  
10 and battery housing of the embodiment of Fig. 11, including the pads;

Fig. 14 is a perspective view of the underside of the combined pad and battery housing of the embodiment of  
15 Fig. 11;

Fig. 15 is a top perspective view of the defibrillator to which the combined pad and battery housing is fitted;

20 Fig. 16 shows the pads used in the embodiment of Fig. 11;

Fig. 17 is a cross-sectional view of the combined pad  
25 and battery housing of the embodiment of Fig. 11, including the pads;

Fig. 18 is a top perspective view, similar to Fig. 13, of a combined pad and battery housing of a still  
30 further embodiment of the invention;

Fig. 19 is a cross-sectional view of the combined pad and battery housing of Fig. 18.

In the drawings, the same or equivalent components have the same reference numerals.

5 Referring to Fig. 1, a first embodiment of disposable electrode assembly 10 for a portable defibrillator 12 comprises a pair of defibrillation electrodes (hereafter referred to simply as "pads") 14 hermetically sealed in a pouch 16 from which they may  
10 be removed for use by removing a "tear-off" strip 17. Flexible electrically conductive leads 18 connect the pads 14 to respective ones of a pair of outer terminals 20 of a connector 22. The connector 22 also houses a set of batteries 24 which are connected in series  
15 across a pair of inner terminals 26 of the connector 22.

In use the connector 22 is plugged into a complementary connector 28 of the defibrillator 12. The  
20 complementary connector 28 has a pair of outer terminals 30 which are engaged by the terminals 20 of the connector 22, and a pair of inner terminals 32 which are engaged by the terminals 26 of the connector 22. Thus, the terminals 26 of the connector 22 are  
25 power output terminals which in use supply power to the defibrillator 12 via the terminals 32, while the terminals 20 of the connector 22 are high voltage input terminals which receive from the defibrillator 12, via the terminals 30, a defibrillation voltage for  
30 application to the pads 14.

The defibrillator 12 may be turned on automatically by insertion of the connector 22 into the connector 28, or

it may be turned on by some further action as will be described. In any event, save for the location of the batteries in the connector 22, in all other respects the defibrillator may be entirely conventional.

5

Fig. 2 shows a modification to Fig. 1, where the pouch 16 contains a voice module 34 comprising a speaker 36, a speaker IC 37, and its own power cell 38. This is activated upon removing the tear-off strip 17 to give  
10 spoken instructions to the lay user how to plug in the connector 22 from which point the defibrillator itself shall take over the operation. Voice modules 34 are well known and used, for example, in the novelty greetings card industry.

15

In another embodiment, Fig. 3, the power supply circuit which connects the batteries 24 in series within the connector 22 includes a spring biased contact 39. This is biased towards a counter contact (not shown) but is  
20 maintained out of engagement with such counter contact by an insulating tab 40 interposed between the two. Removal of the tear-off strip 17 to open the pouch 16 pulls the tab 40 from under the contact 39, allowing it to engage its counter contact and thus automatically  
25 complete the power supply circuit within the connector 22.

A variation of this includes means for sensing when the pads 14 are separated, Fig. 4, by low power monitoring  
30 circuitry internal to the defibrillator 12 which checks to see if an electrical connection 41 between the pads 14 has been broken. The defibrillator 12 turns itself on when the connection 41 is sensed as broken, meaning

that the pads 14 have been removed from the pouch 16 and separated. One way of doing this is shown in the circuit diagram of Fig. 4A.

5 The pads 14, here individually referenced 14A and 14B to distinguish one from the other, are mounted on a release liner 15 within the pouch 16 (not shown). The connection 41, having a resistance  $R_3$ , is also mounted on the liner 15 and creates an electrical link between  
10 the two pads 14A and 14B. As described, the pads 14A and 14B are attached to the connector 22 containing the batteries 24 which supply a voltage  $V_{batt}$ .

When the connector 22 is plugged into the defibrillator  
15 12 the pads 14A and 14B are connected to a changeover unit 80 (such as a relay) having changeover contacts 82. Initially, as seen in Fig. 4A, the changeover contacts 82 connect the pad 14A to  $V_{batt}$  and the pad 14B to ground via a resistor  $R_1$  and to the source of an FET  
20 Q1. This forms a circuit in which the source of Q1 is pulled up to  $V_{batt}$  via  $R_3$ , resistor  $R_1$  being sufficiently large that current drain from  $V_{batt}$  and the pull down effect with respect to  $R_3$  is minimised.  $V_{batt}$  is also be applied to the gate of Q1 and to a resistor  
25 R2 pulling up the drain of Q1. Resistor R2 is sufficiently large that current drain from  $V_{batt}$  is minimised. This state is maintained as long as the pads 14 remain attached to the release liner 15.

30 To turn the defibrillator on, either or both pads 14 are removed from the release liner 15. This breaks the circuit formed by  $R_3$  which pulled the source of Q1 to



- $V_{batt}$ , so that the source of Q1 is now pulled to ground via R1. This turns on Q1 and in doing so pulls down the voltage at the drain of Q1 to a value determined by the divider created by R2 and R1. This voltage drop 84
- 5 is detected by the defibrillator control circuitry (not shown) which responds by switching over the contacts 82 to connect the pads 14A and 14B to respective high voltage terminals HV1 and HV2 within the defibrillator.
- 10 The embodiments of Figs. 3 and 4 assume that the connector 22 is, in use, already plugged into the defibrillator 12, so the battery power is only required to be applied when the pads are actually deployed for use. This contrasts with the embodiment of Fig. 1 where
- 15 it is assumed that the connector 22 is not pre-connected to the defibrillator 12, so that the mere act of plugging it in can apply power and turn the defibrillator on.
- 20 In the embodiment of Fig. 5 the batteries are not housed in the connector 22 but instead a flat battery pack 42 is mounted on the rear of one or both pads 14. This requires extra wires 44 to the connector 22 to carry the power. As shown in Fig. 6, and similar to
- 25 the embodiment of Fig. 3, the power supply circuit may include a spring contact 39 biased against a counter contact 46 but normally held electrically disconnected therefrom by an insulating tab 40. The tab 40 is fixed to a release liner 48 such that, when the liner 48 is
- 30 on the pad 14, the tab 40 is interposed between the contacts 39 and 46. However, when the liner 48 is removed from the pad 14 the tab 40 is withdrawn from

between the contacts 39 and 46 to complete the power circuit and power up the defibrillator 12 for use.

In the embodiment of Fig. 7, when the pads 14 are not  
5 in use they are stowed (attached, for example, by Velcro) in a shallow depression or recess 50 in the defibrillator 12 housing and the connectors 22 and 28 are pre-engaged (in Fig. 7 the two connectors are shown as a single item 22/28 for simplicity). In this case  
10 the batteries 24 are housed in the connector 22, as in Fig. 1. Within the defibrillator 12 the power supply circuit includes a pair of contacts 52 and 54 which are biased towards one another but normally held apart by an insulating pin 56 which is removably inserted into  
15 the defibrillator housing from outside. This pin 56 also cooperates with the pad leads 18 (or with the pads 14 themselves) such that when the pads 14 are removed from the recess 50 the pin 56 is automatically removed from between the contacts 52, 54 so that power from the  
20 batteries 24 is automatically connected to the defibrillator 12.

The embodiment of Fig. 8 is similar to that of Fig. 7 except that the batteries 24 are again no longer housed  
25 in the connector 22 but come in the form of a flat battery pack 58 housed, together with the pads 14, in a tray 60 which fits in the recess 50. In this case either the act of removing the pads from the tray, or the act of removing the tray, removes the pin 56 from  
30 between the power contacts 52, 54.

Fig. 9 shows a variation of Fig. 7 wherein one of the pads 14 is fixed to the rear of the defibrillator 12

housing and its electrical connection to the defibrillator is either made directly through the defibrillator housing via a contact 62 in the housing wall or via a lead 18 and the connectors 22/28 as in Fig. 7 (where the connection to the pad 14 is made directly via the contact 62 there will only need to be one terminal 20 on the connector 22 and correspondingly only one terminal 30 on the connector 28). In this embodiment the operation is similar to that of Fig. 7 except that the defibrillator 12 itself is placed on the patient's chest and effectively becomes one of the patient pads. The other pad 14 performs the device turn-on operation as by pulling out the mechanical block (pin 56) in the power supply circuit when it is pulled away from the defibrillator 12.

Fig. 10 is an exploded perspective view of a practical implementation of the embodiment of Fig. 7 (the leads 18 are not shown). The defibrillator 12 comprises upper and lower housing halves 12a and 12b which contain a digital printed circuit board (PCB) 70 and a high voltage PCB 72. The batteries 24 are accommodated in the connector 22 which plugs into the socket connector 28 in the upper housing half 12a. The recess 50 is formed in the lower housing half 12b and contains the pads 14 when they are not in use. The insulating member 56 enters a slot 74 in the lower housing half 12b to be interposed between the contacts 52 and 54 (Fig. 7) and is operatively coupled to the pads 14 and/or their leads so that it is withdrawn from the slot 74 when the pads are removed from the recess 50.

Referring now to Figs. 11 to 17, a further embodiment of the invention comprises a defibrillator 12 having a recess 100 (Fig. 15) to slidably receive a housing 102 which accommodates both the batteries 24 and the pads 14 in common and also functions as the connector 22.

The housing 102 comprises an upper shallow tray-like recess 103A for accommodating the pads 14 (as shown in Figs. 13 and 17) and a deeper recess 103B occupying part of the area of the tray-like recess 103A for accommodating the batteries 24. Accordingly, the housing 102 has a stepped lower surface 104, Fig. 14, with a riser portion 104A joining the two portions 104B and 104C of the lower surface which correspond respectively to the tray-like and battery recesses 103A, 103B respectively and which are accordingly at different levels.

On the inside of the housing 102 the riser portion 104A has pairs of high voltage input and power output terminals 20, 26 respectively (Fig. 11), the pads 14 being connected to respective ones of the terminals 20 by respective leads 18 and the batteries 24 being connected in series across the terminals 26. The leads 18 pass under a strain relief member 106 to prevent strain on the connection between the leads 18 and terminals 20. The terminals 20, 26 pass fully through the wall of the housing 102 at the riser portion 104A to appear exposed at the lower surface 104, Fig. 14.

The recess 100 in the defibrillator 12, Fig. 15, has a stepped formation complementary to that of the housing 102, the recess 100 extending to the edge 108 of the

defibrillator 12. The recess 100 has a riser portion 100A having pairs of terminals 30, 32 for mating with the corresponding pairs of terminals 20, 26 on the housing 102, the terminals 30,32 extending through the wall of the defibrillator housing at the riser portion 100A and being connected to the internal circuitry (not shown) of the defibrillator 12.

In use, the batteries 24 are inserted in the recess 103B of the housing 102 and then the pads 14 are laid in the shallow recess 103A over the batteries, Fig. 13. The leads 18 are neatly coiled up above the batteries 24. The pads are joined by a frangible link 41 (Fig. 16) as previously described, this being connected by a short piece of cord 43 to the strain relief member 106 (or elsewhere to the housing 102). The pads 14 are covered with a peel-off protective cover (not shown).

Now the housing 102 is slid into the recess 100 from the edge 108 of the defibrillator 12, the housing 102 being slid in a direction substantially parallel to the plane of the shallow recess 103A. The sliding movement is guided by ribs 110 on opposite sides of the housing 102 engaging under corresponding ribs 112 on opposite sides of the recess 100. When the housing 102 is fully home in the recess 100 resilient ears 114 on opposite sides of the housing 102 engage slots 116 on opposite sides of the recess 100, thereby retaining the housing 102 in position in the recess 100. In the fully home position the terminals 20, 26 exposed on the underside of the housing 102 (Fig. 14) mate with the terminals 30, 32 respectively on the defibrillator 12.

To use the defibrillator, the covering over the pads 14 is peeled off and the pads 14 removed from the recess 103A. This act of removal severs the frangible link 41 thus powering up the defibrillator 12 as previously  
5 described (alternatively the cord 43 may be omitted and the link 41 severed by separation of the pads 14). This is the situation shown in Fig. 11, where the pads 14 are shown deployed for use. After use, the housing 102 is removed from the defibrillator 12 by squeezing  
10 the ears 114 towards one another to disengage from the slots 116 and sliding the housing 102 out of the recess 100. Now a fresh housing 102 containing pads and batteries ready for the next use of the defibrillator is slid into the recess 100.

15

Figs. 18 and 19 are views, similar to Figs. 13 and 17, of a combined pad and battery housing of a still further embodiment of the invention. Since the main defibrillator body 12, as seen for example in Fig. 15,  
20 remains substantially unchanged in this embodiment, only the combined pad and battery housing 102 is shown. As before, the housing 102 is slid into the recess 100 from the edge 108 of the defibrillator 12 until the resilient ears 114 engage the slots 116 to retain the  
25 housing 102 in position in the recess 100 with the terminals 20, 26 mating with the terminals 30, 32 respectively.

However, in this embodiment the tray-like recess 103A  
30 is closed by a lid 200 which can be slid off the housing 102 in the direction of the arrow in Figs. 18 and 19 by pulling on a tab 202 fixed to the front edge of the lid. The pads 14 are removably fitted to the

underside of the lid 200, so that removal of the lid automatically removes the pads 14 from the recess 103A. The act of sliding the lid 200 out of the housing 102 automatically breaks the frangible link 43 (not shown in Fig. 19) to power up the device as previously described. The lid 200 is releasably retained in position on the housing 102 by integrally moulded pips 204 on the edge of the housing which resiliently engage respective shallow depressions 206 on the edge of the lid.

The invention is not limited to the embodiments described herein which may be modified or varied without departing from the scope of the invention.

Claims

1. A portable defibrillator comprising a housing containing defibrillator circuitry and a disposable electrode assembly external to said housing, the electrode assembly comprising two defibrillator electrodes, at least one battery for powering the defibrillator circuitry, and a connector for connecting the electrode and battery to the defibrillator housing, wherein the connector has power output terminals for connecting the at least one battery to the defibrillator circuitry and at least one high voltage input terminal for receiving a defibrillation voltage to be applied to the electrodes, and wherein the electrodes have a stowage location on the defibrillator housing and the defibrillator has means for automatically connecting power to the defibrillator circuitry upon deployment of the electrodes.
2. A defibrillator as claimed in claim 1, wherein the defibrillation electrodes are electrically connected by a frangible connection which is broken when the electrodes are deployed for use, and wherein the defibrillator circuitry determines when the frangible link is broken to complete a power supply circuit in the defibrillator housing.
3. A defibrillator as claimed in claim 1, wherein when the electrodes are in their stowage location an insulating member interrupts a power supply circuit in the defibrillator housing, and wherein the insulating member cooperates with the electrodes such that removal of the electrodes from their stowage location causes





removal of the insulating member from the power supply circuit and resultant completion of said circuit.

4. A defibrillator as claimed in claim 1 or 2,  
5 wherein the electrode assembly comprises a common housing for the defibrillation electrodes and the at least one battery, the common electrode/battery housing being removably fitted to the defibrillator housing and having power output and high voltage input terminals  
10 for connection to corresponding terminals on the defibrillator housing.

5. A defibrillator as claimed in claim 4, wherein the common housing is slidable into a complementary recess  
15 in the defibrillator housing, the sliding movement bringing the terminals on the two housings into engagement.

6. A defibrillator claimed in claim 5, wherein the  
20 common housing comprises a shallow upper tray-like recess for accommodating the defibrillator electrodes and a deeper battery-containing recess occupying part of the area of the tray-like recess whereby the common housing has a stepped lower surface, wherein the  
25 defibrillator housing has a stepped recess complementary to that of the lower surface of the common housing, wherein the common housing is slid into the recess in the defibrillator housing from an edge thereof in a direction substantially parallel to the  
30 plane of the tray-like recess, and wherein the engaging terminals are located on riser portions of the lower surface of the common housing and the complementary recess in the defibrillator housing.

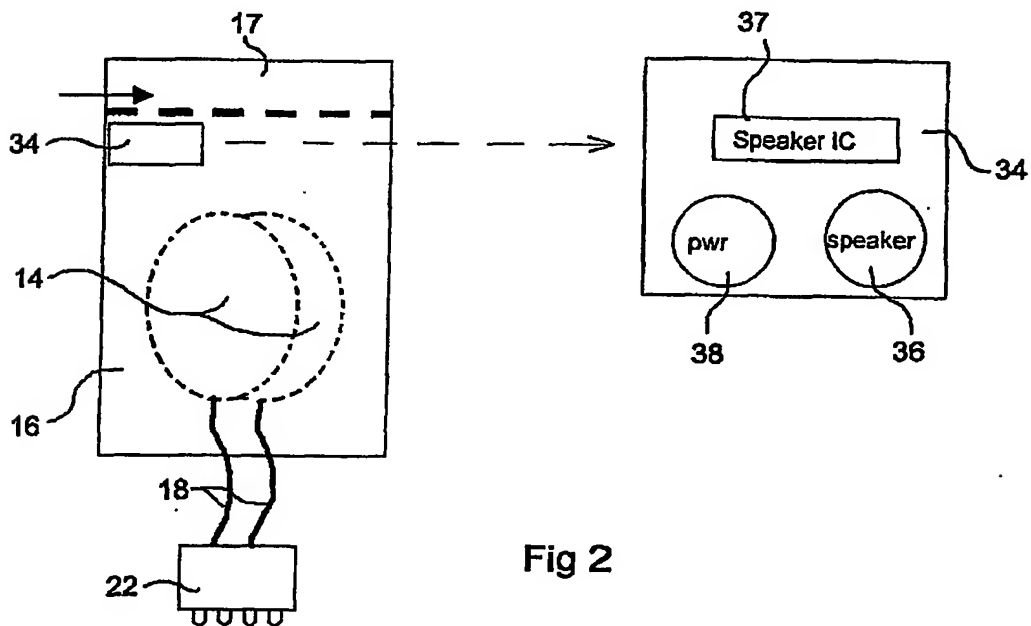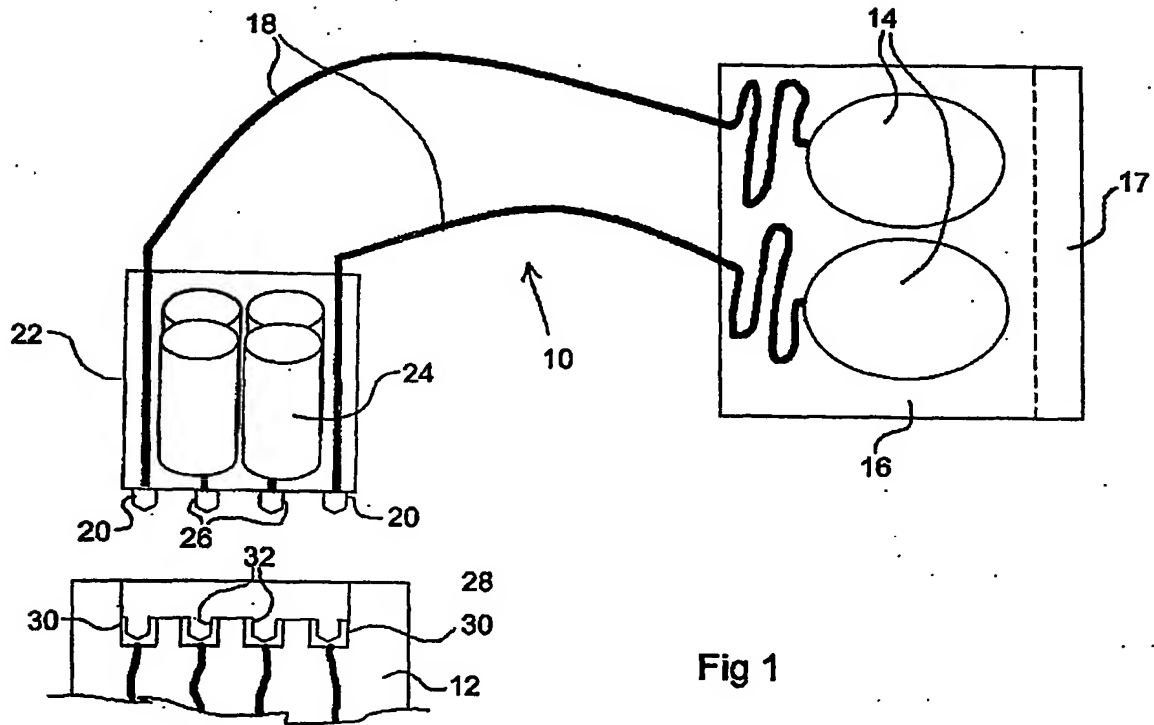

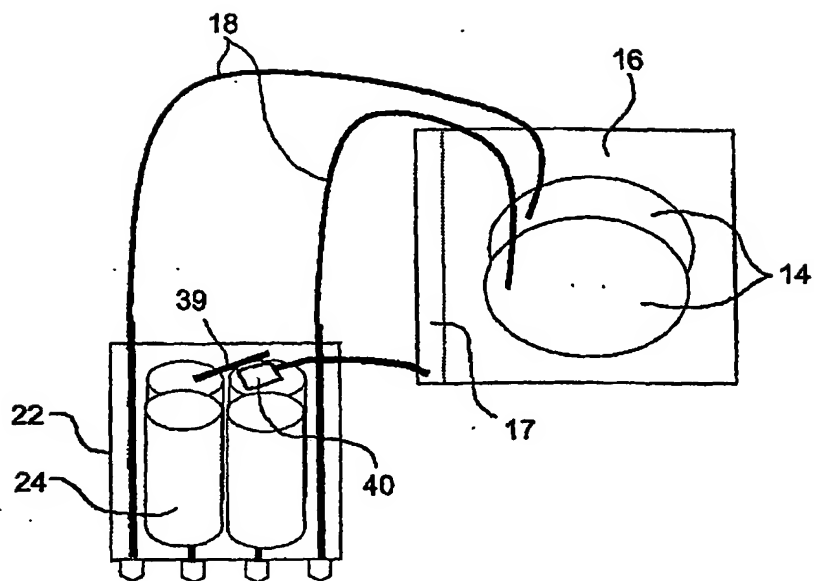


Fig 3

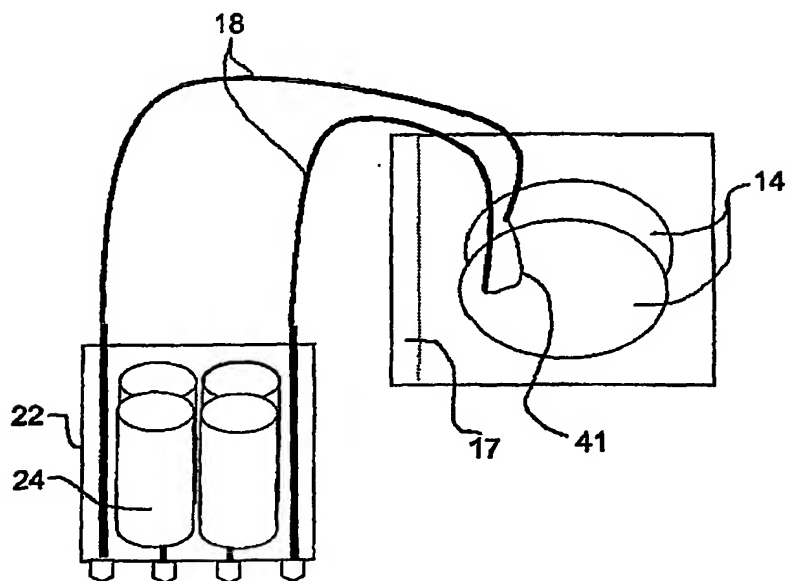


Fig 4

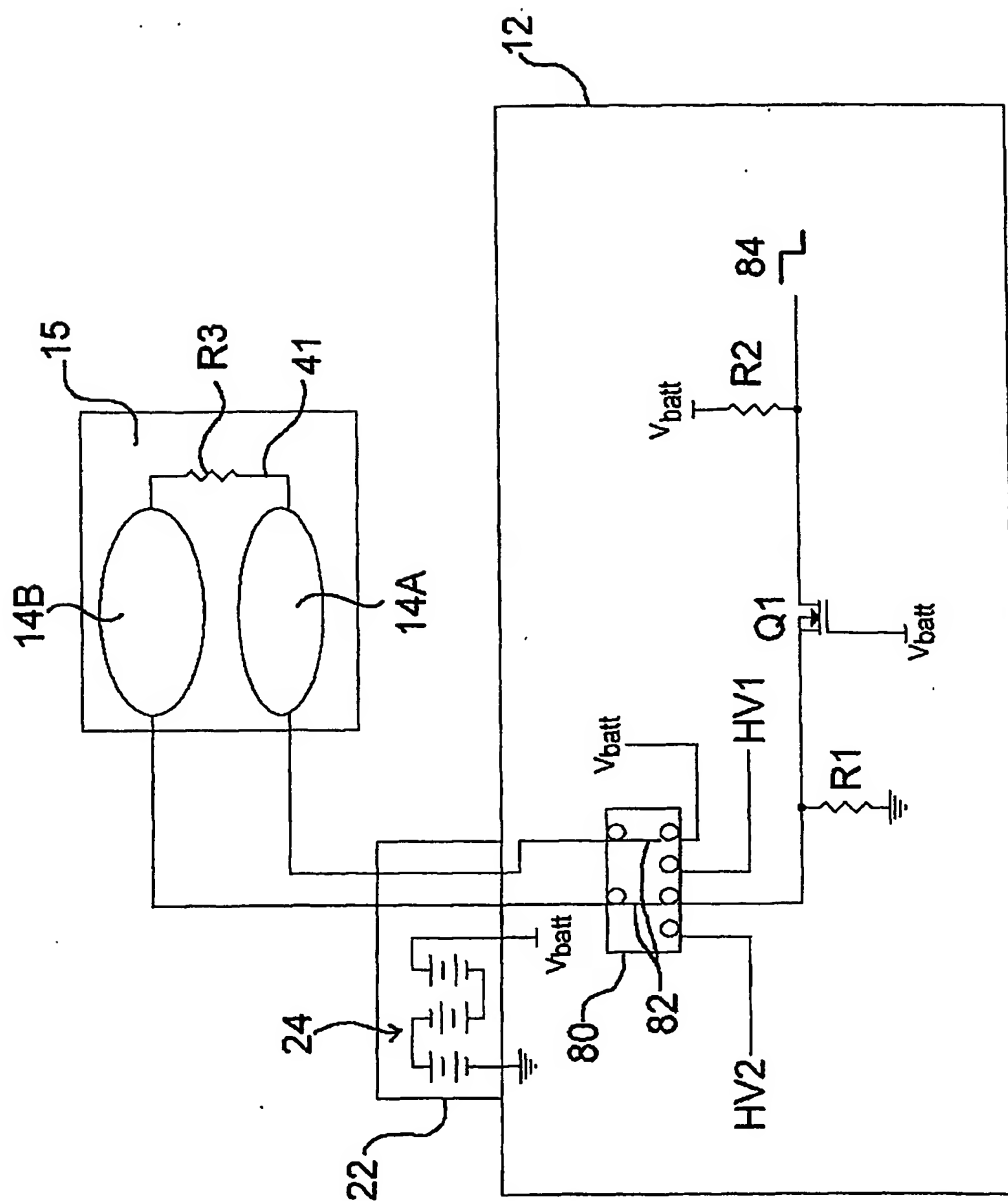


Fig 4A

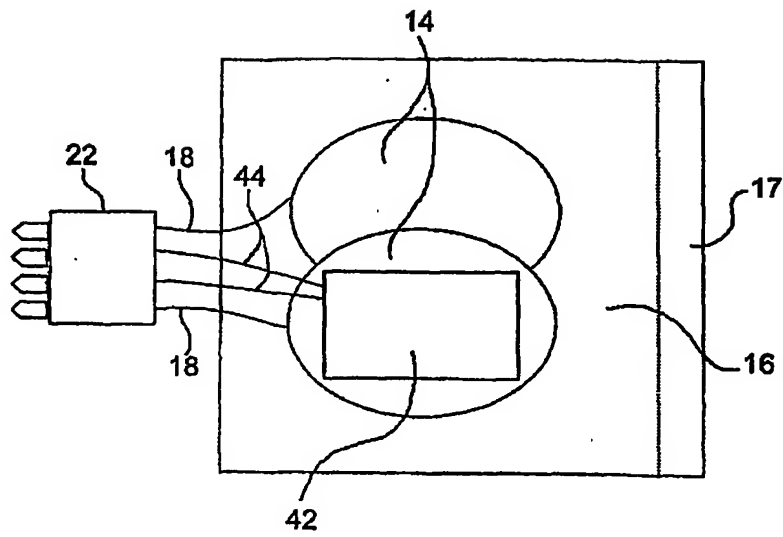


Fig 5

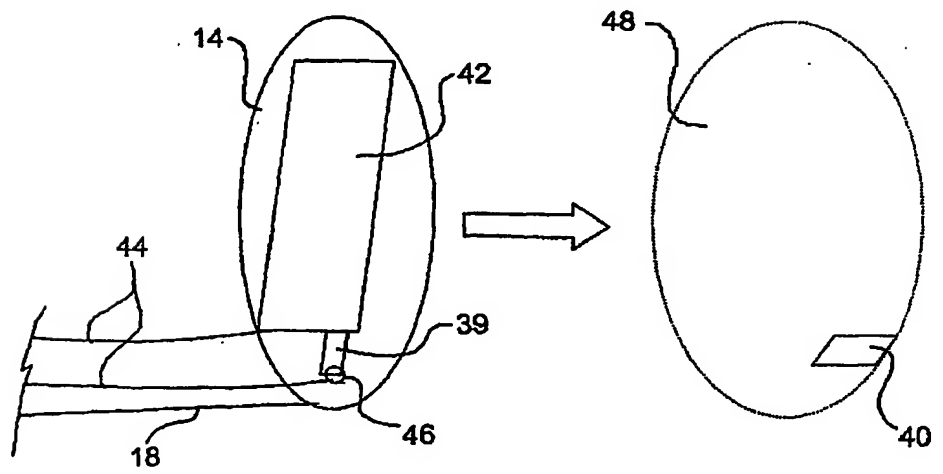


Fig 6

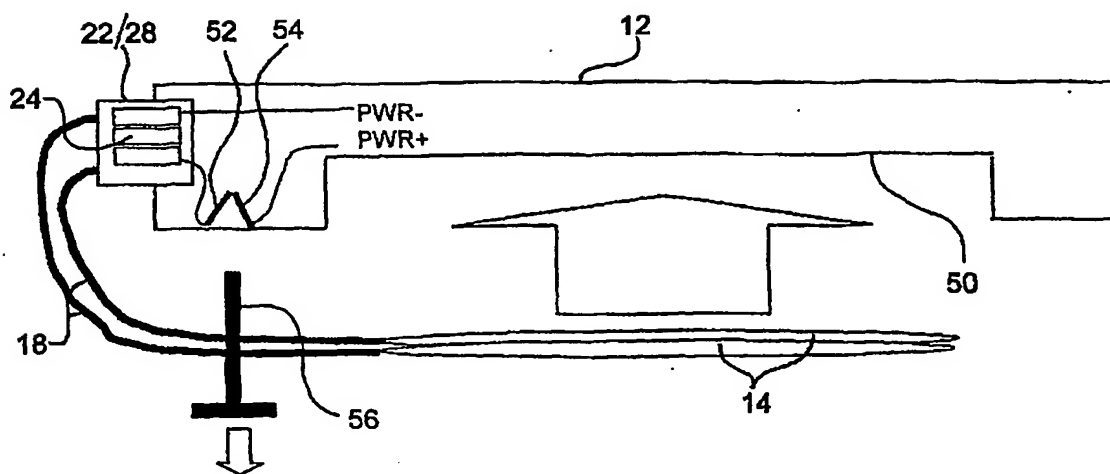


Fig 7

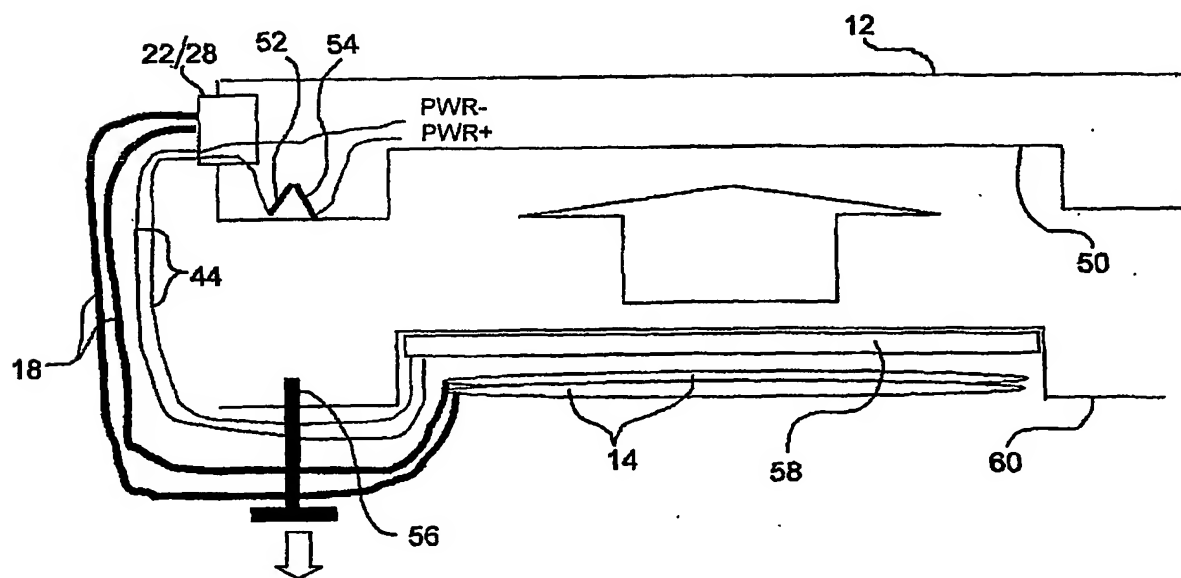


Fig 8

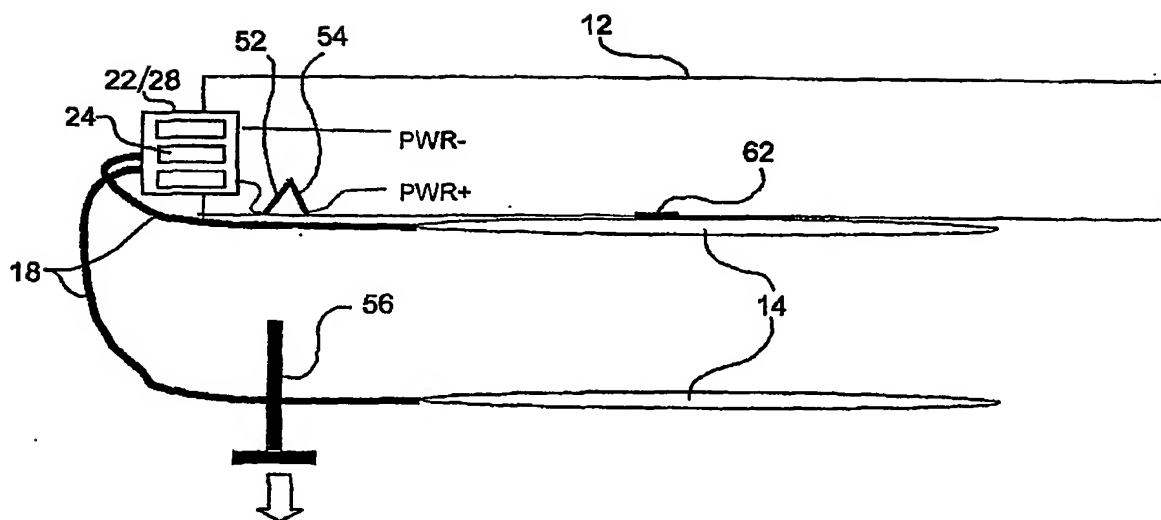


Fig 9

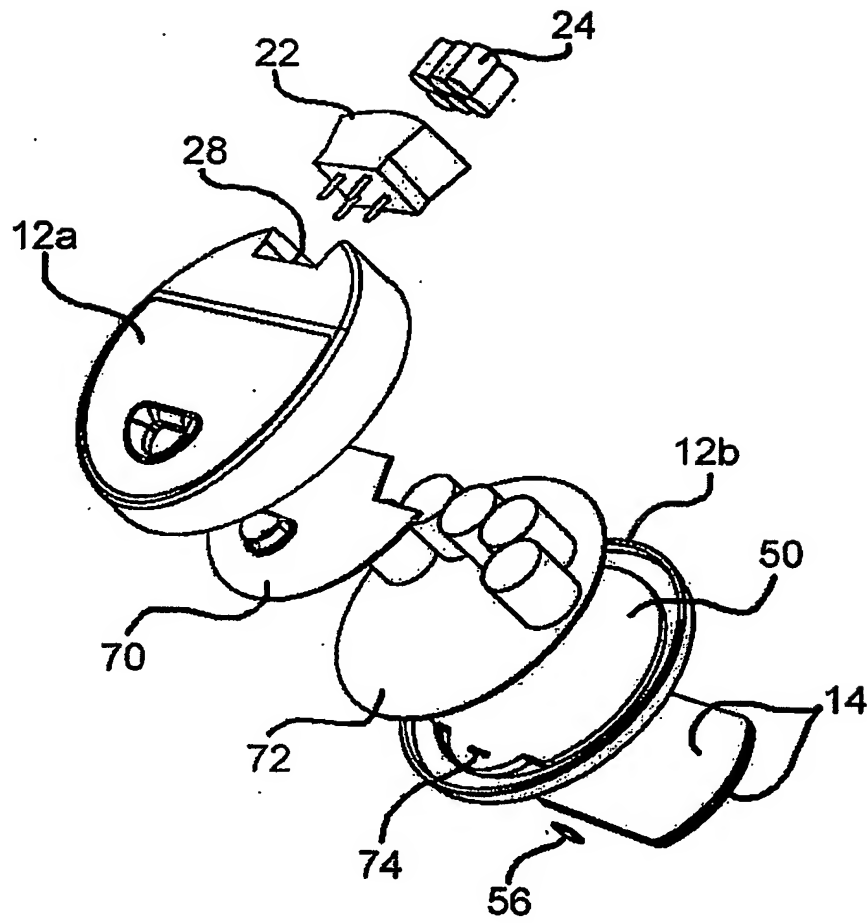


Fig 10



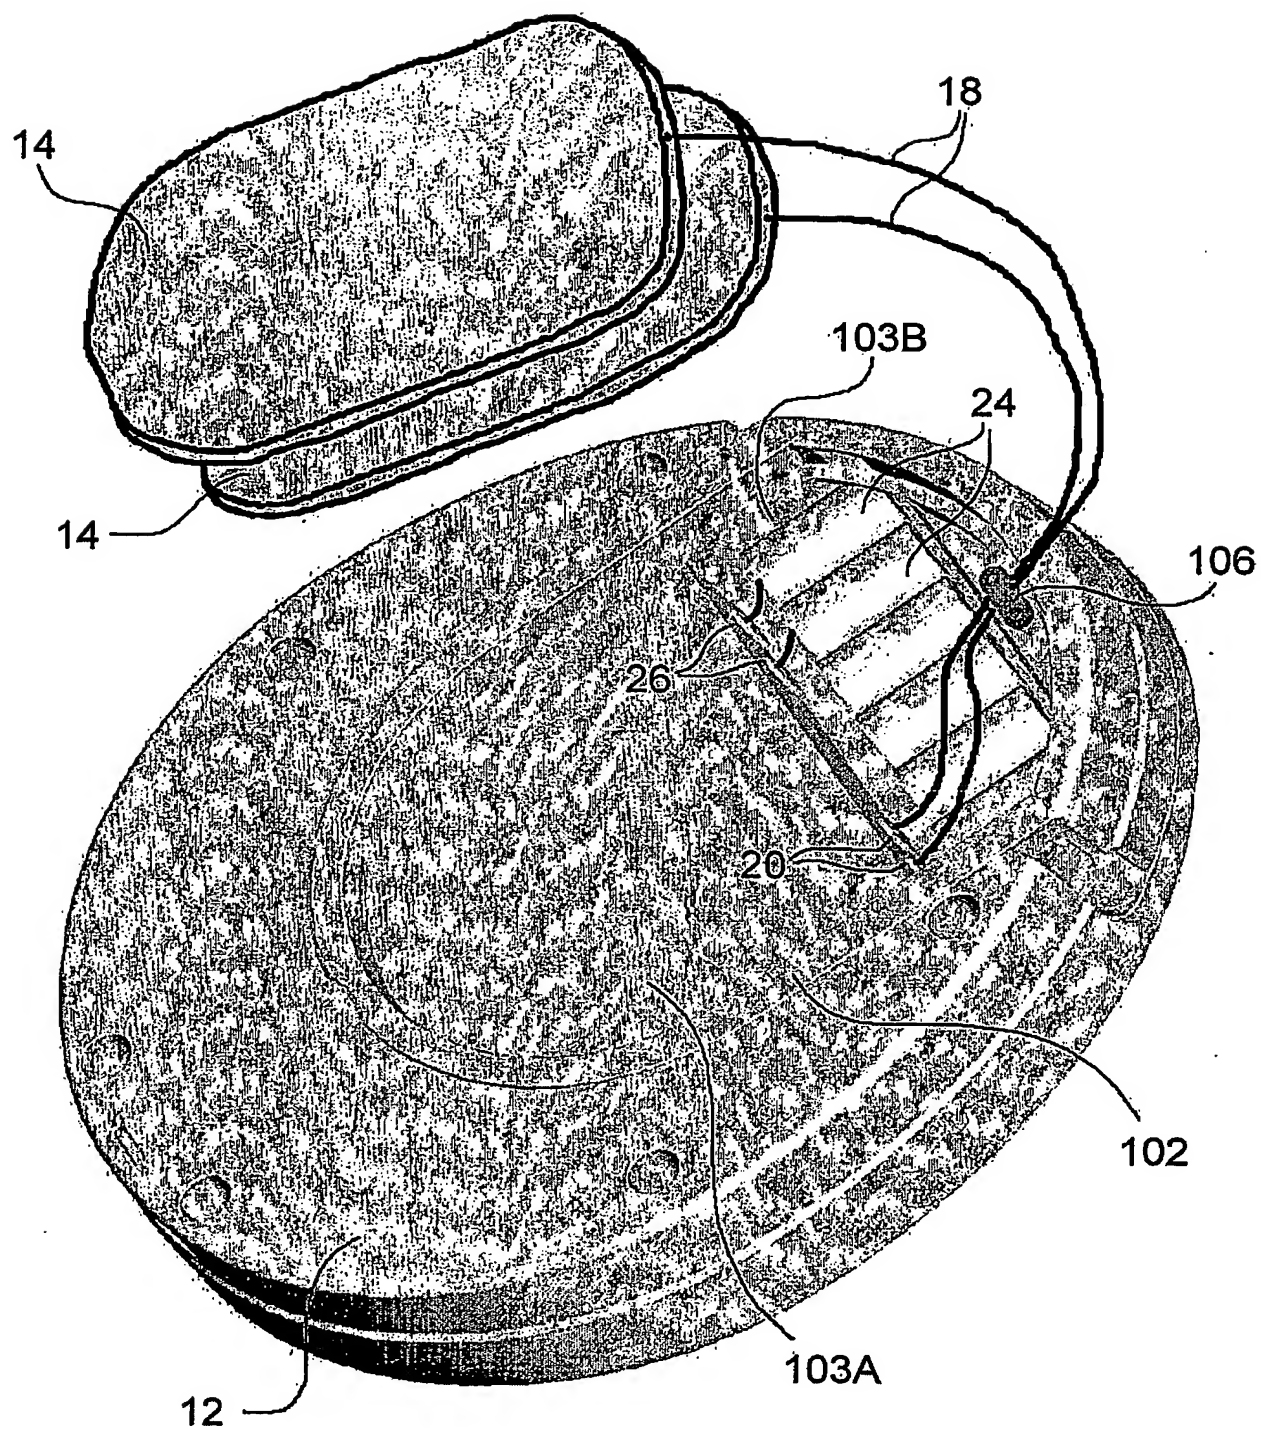


Fig. 11

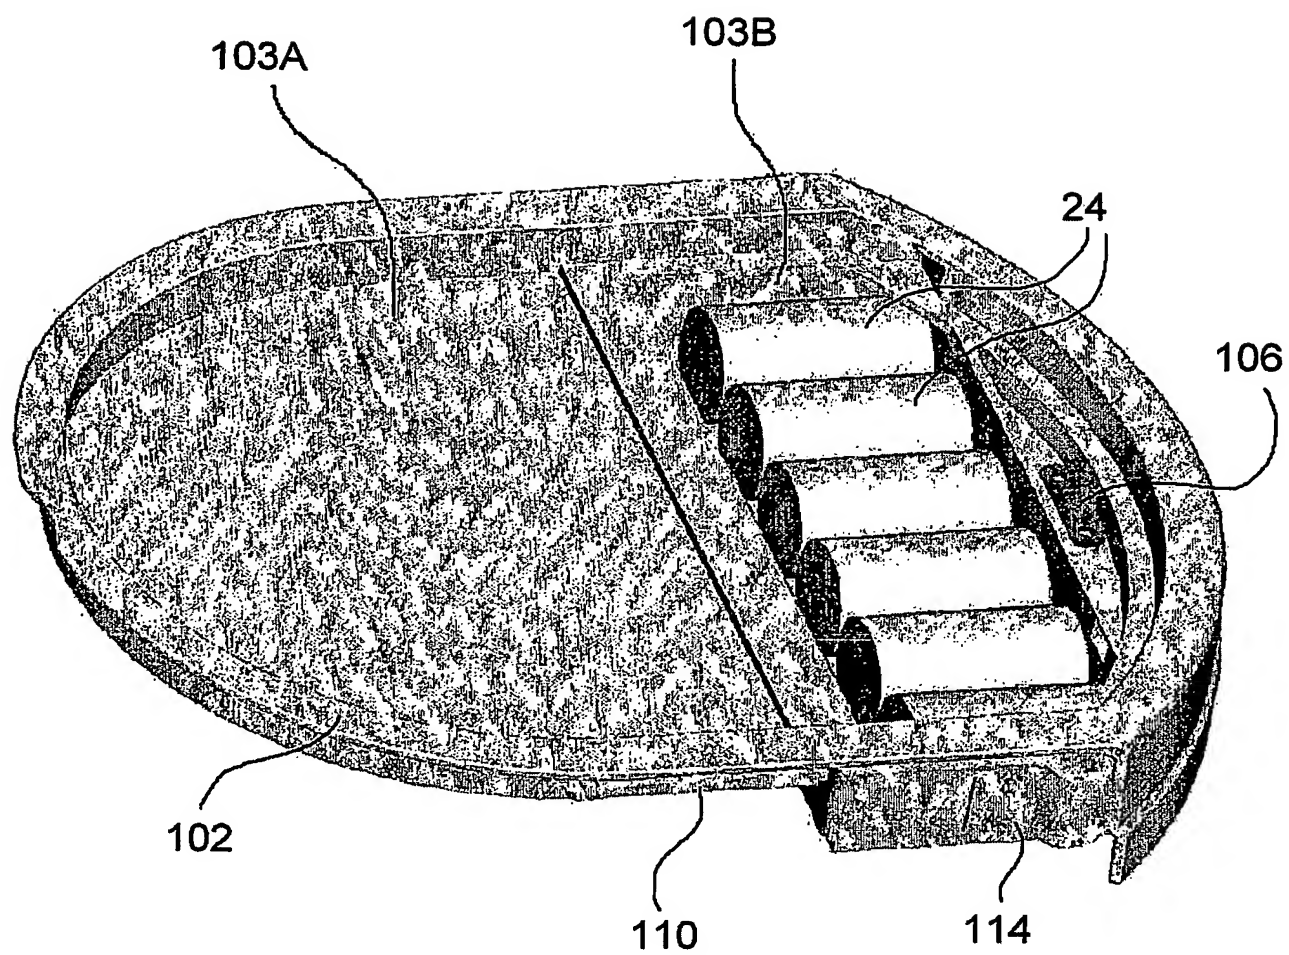


Fig. 12

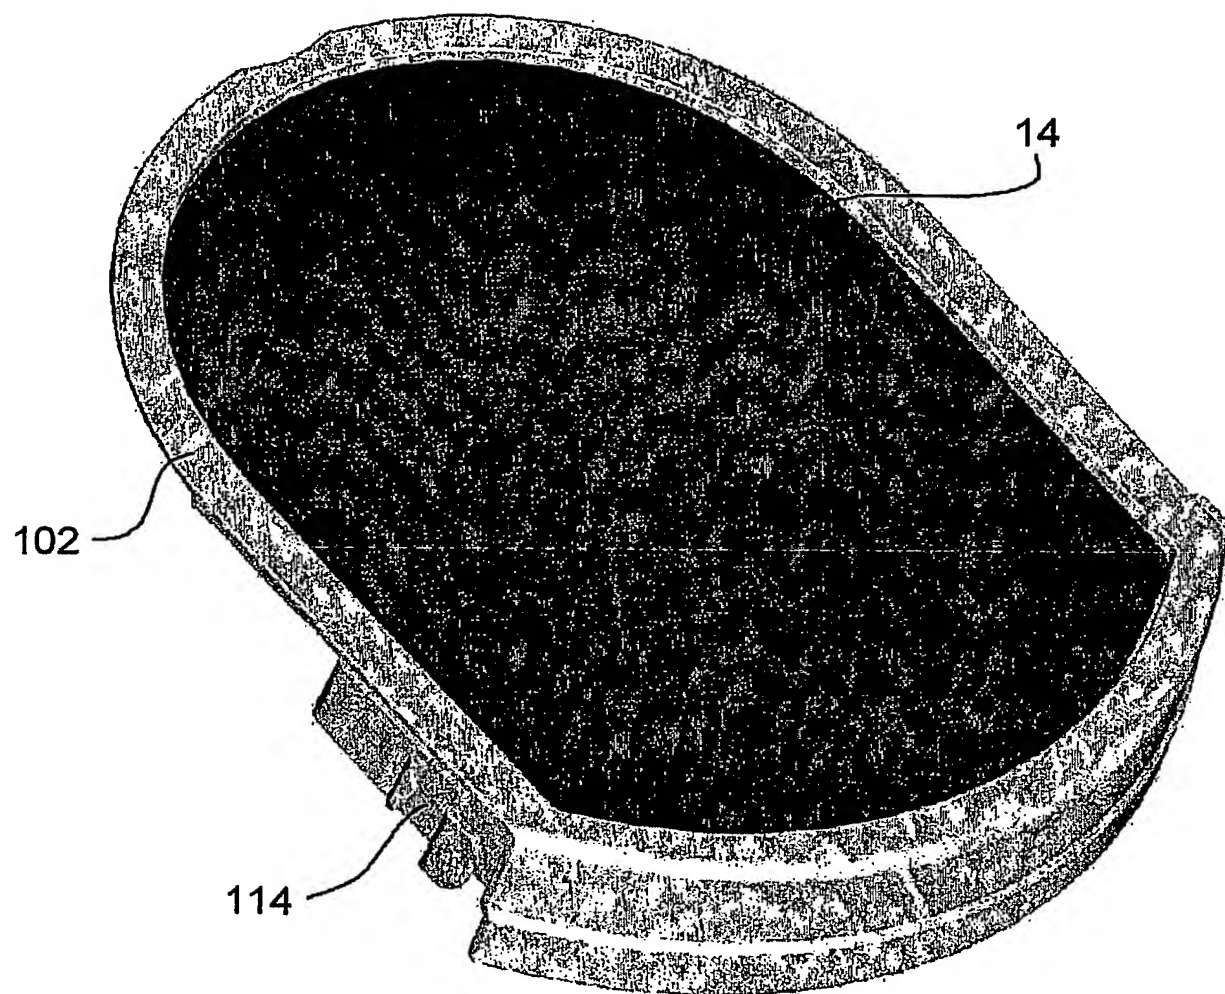


Fig. 13

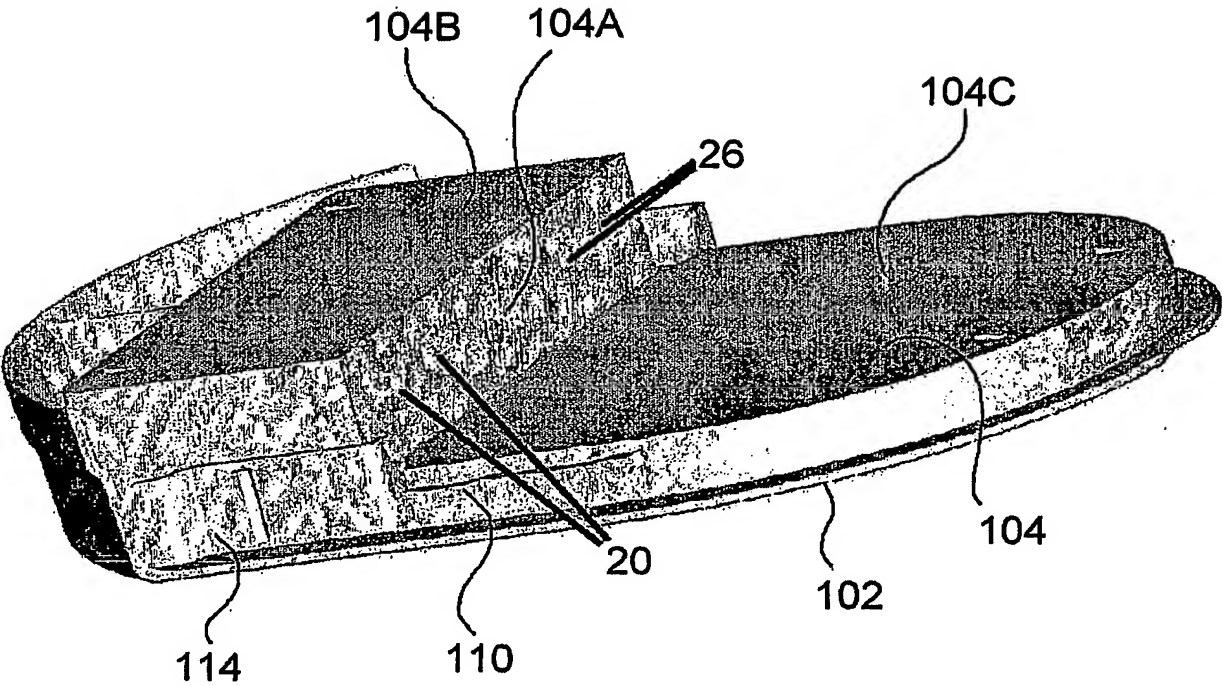


Fig. 14

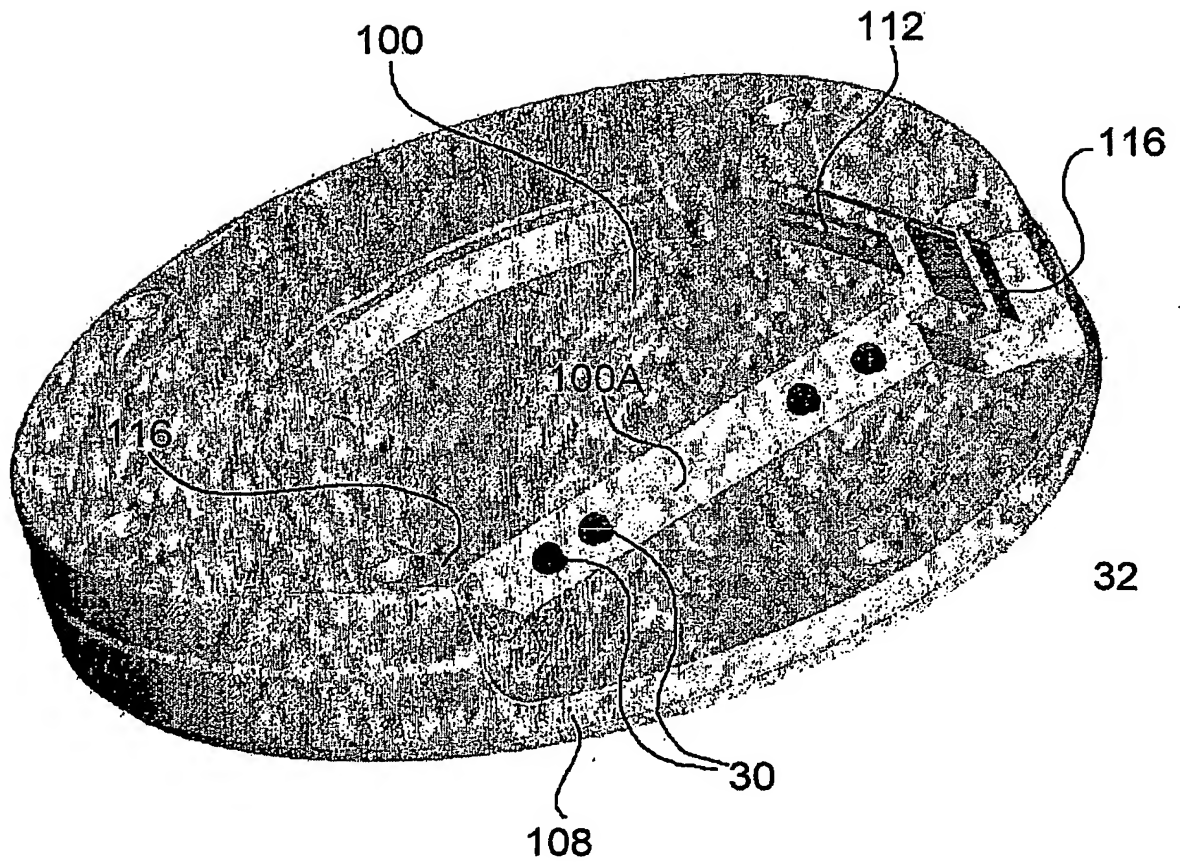


Fig. 15

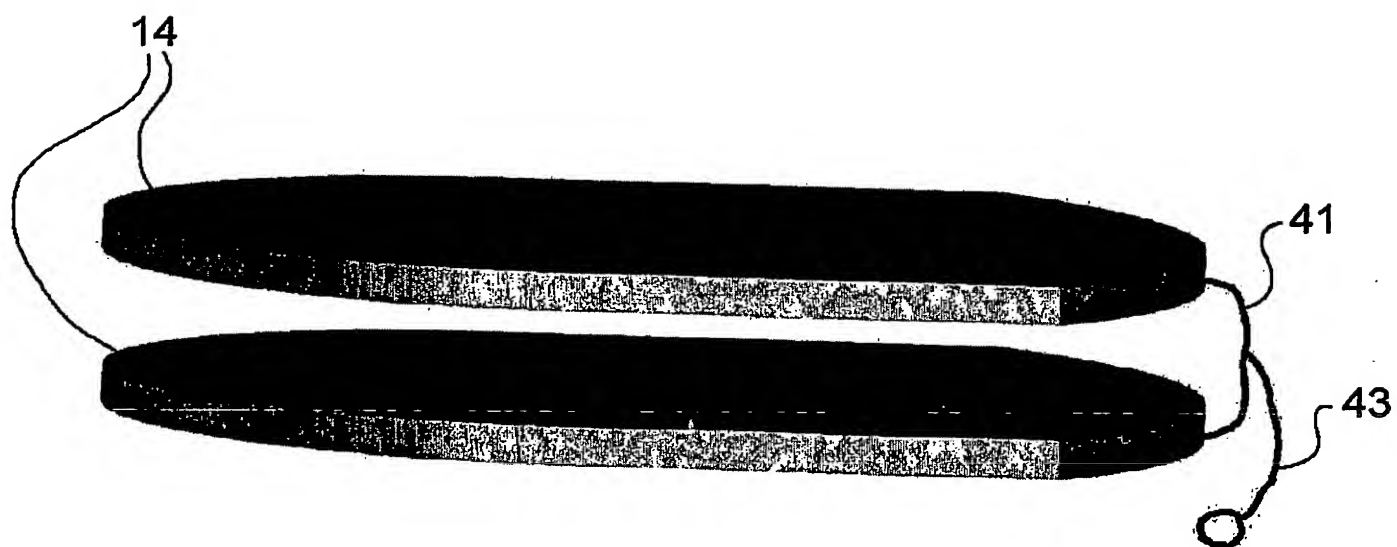


Fig. 16

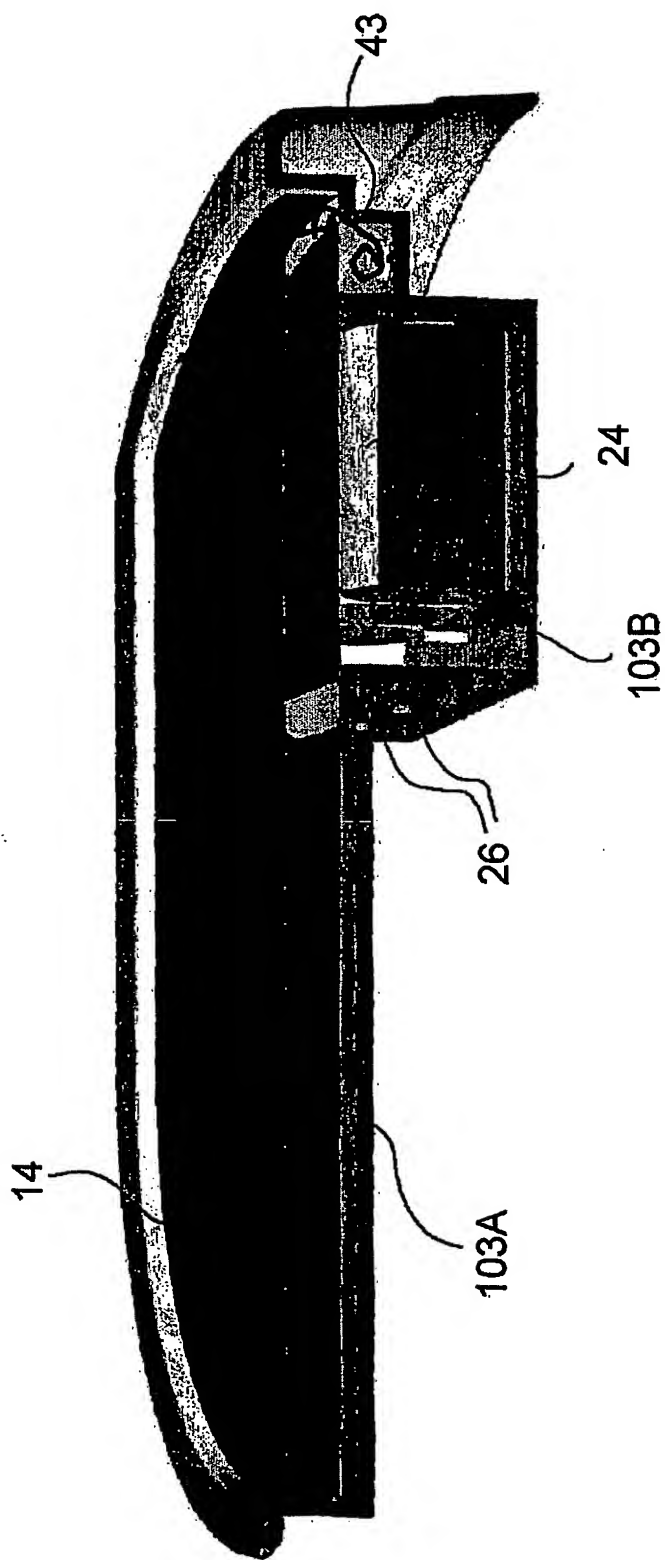


Fig. 17

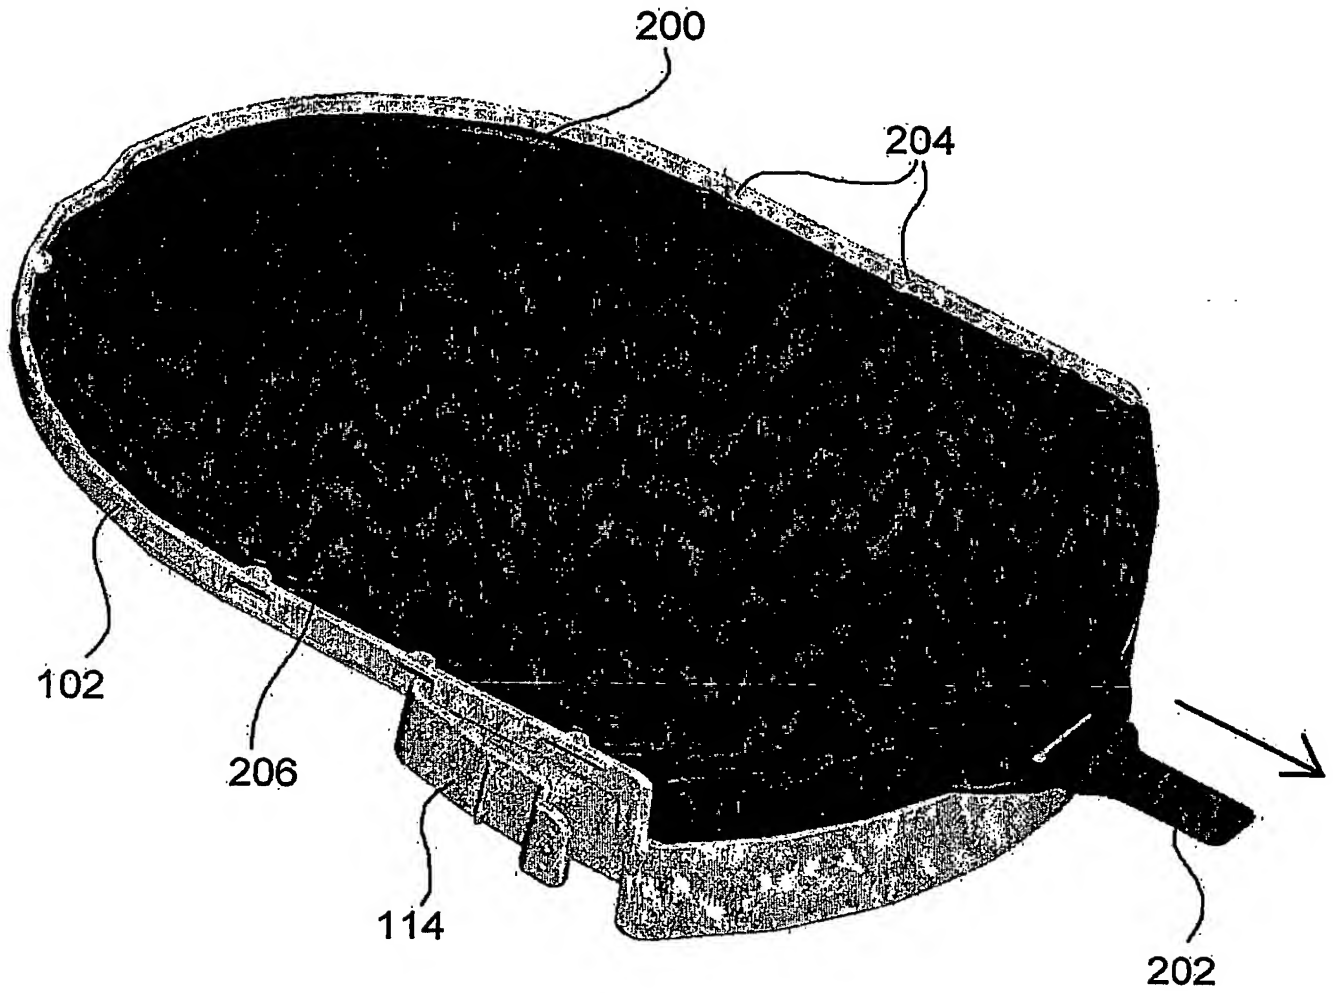


Fig. 18



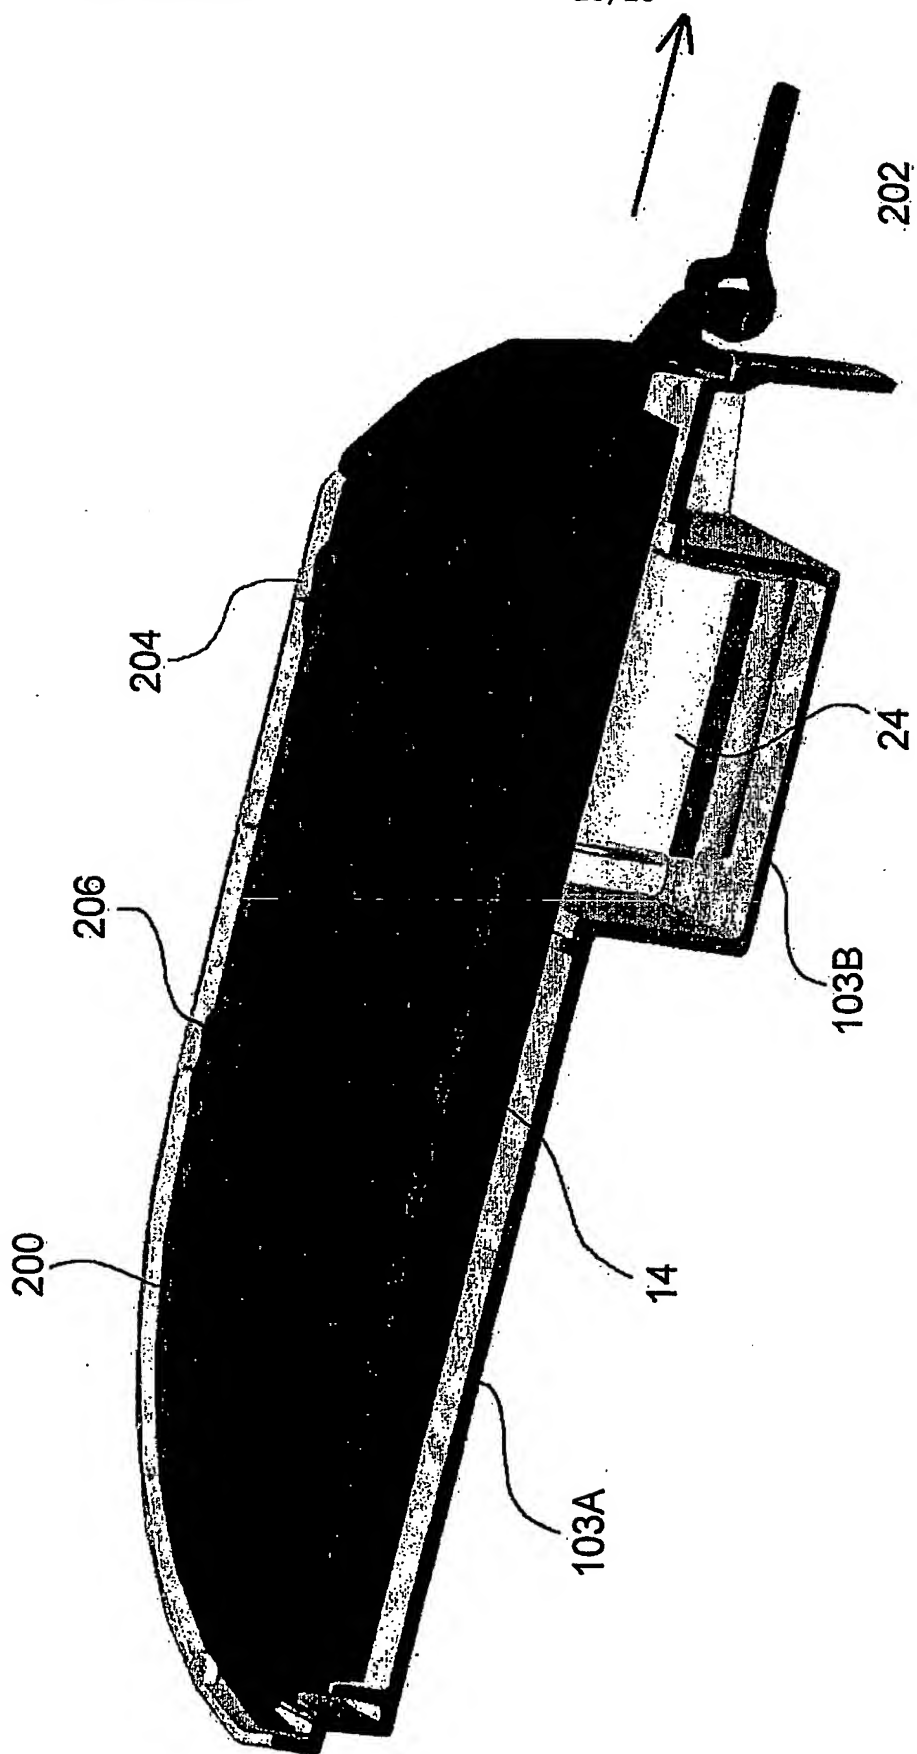


Fig. 19

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/000402A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61N1/39

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A61N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 427 083 B1 (TOTMAN MARK H ET AL) 30 July 2002 (2002-07-30) column 8, line 2-17 column 16, line 4-48 column 19, line 10-16; figures 1-3, 7A, 7B, 17	1, 2, 5, 7, 11
A		3, 4, 6, 8-10, 12, 13
P, X	WO 03/039664 A (KONINKL PHILIPS ELECTRONICS NV) 15 May 2003 (2003-05-15) page 3, line 21-26 page 4, line 31 -page 6, line 2 page 7, line 30 -page 8, line 13 page 9, line 17-32; figures -/-	1, 2, 5, 7, 11, 12

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

5 May 2004

Date of mailing of the international search report

26/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Küster, G

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/000402

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 125 298 A (GILMAN BYRON L ET AL) 26 September 2000 (2000-09-26) column 2, line 66 -column 5, line 18; figures 1,3,4	1,3,4,7, 8,10

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/000402

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6427083	B1	30-07-2002	US 6148233 A	14-11-2000
			AU 6454798 A	22-09-1998
			CA 2283339 A1	11-09-1998
			EP 1011806 A2	28-06-2000
			JP 2002514107 T	14-05-2002
			WO 9839061 A2	11-09-1998
			US 2003055460 A1	20-03-2003
			US 2003032988 A1	13-02-2003
			US 6301502 B1	09-10-2001
			US 6546285 B1	08-04-2003
			US 6374138 B1	16-04-2002
			US 6418342 B1	09-07-2002
			US 6304780 B1	16-10-2001
WO 03039664	A	15-05-2003	WO 03039664 A1	15-05-2003
US 6125298	A	26-09-2000	NONE	